

Ventilatieroosters


DR 160




Ronde plafandroosters DR 160

Ronde, metalen afvoer- of toevoerroosters.
Wit gelakt, uitgerust met een regelklep DTO 12.


Type DR	Debiet mini (m ³ /h)	Debiet maxi (m ³ /h)
106 (6')	90	180
200 (8')	200	350
250 (10')	350	600
315 (12')	500	900

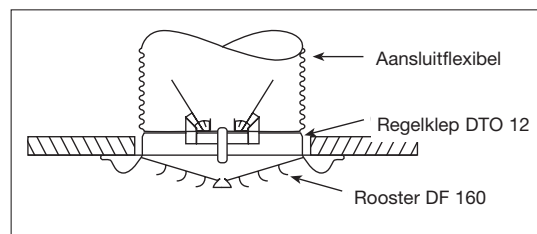

Selectiegrafiek

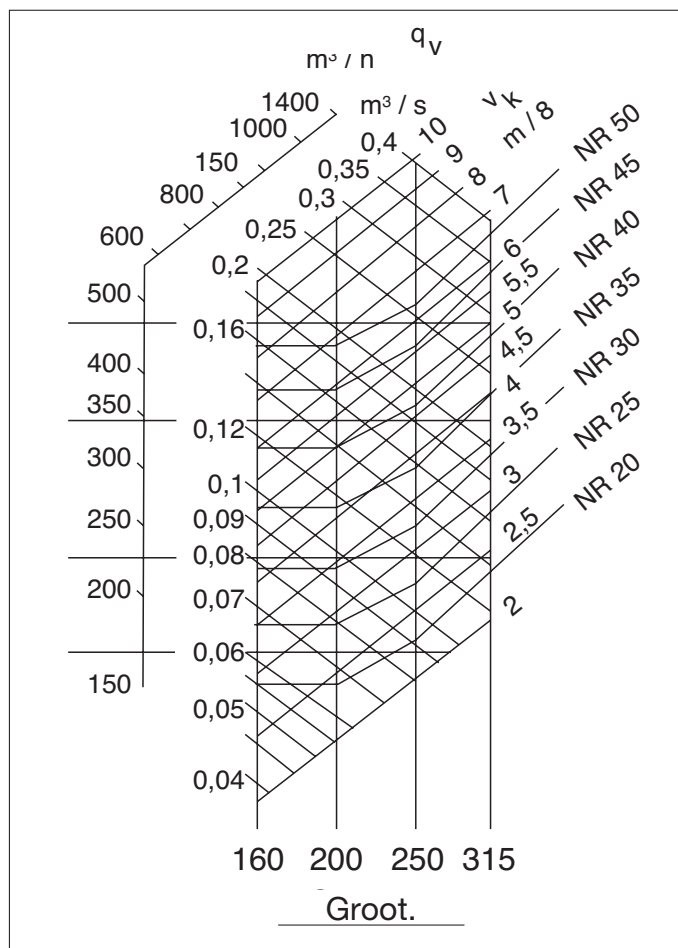

Montage afmetingen

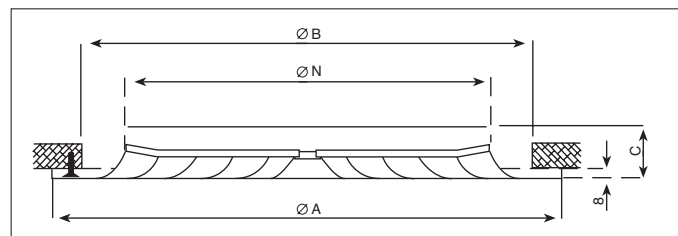

Type	$\varnothing N$	$\varnothing A$	$\varnothing B$	C	Vrije doorlaat m ²
160	158	248	193	36	0,0190
200	198	298	230	36	0,0277
250	248	363	280	36	0,0403
315	313	448	350	36	0,0570

AK-waarden (m ²)				
Groot.	160	200	250	315
Ak (m ²)	0,0190	0,0277	0,0403	0,0570